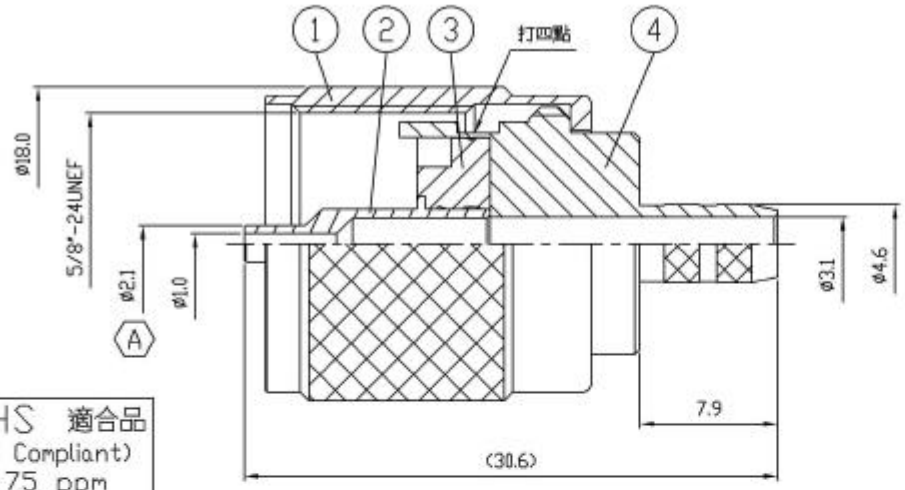

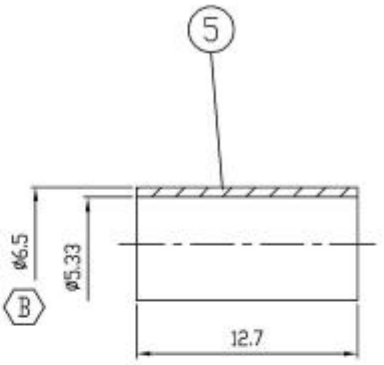

RoHS 適合品
(RoHS Compliant)
Cd≤ 75 ppm
Pb≤ 4 wt%

Electrical:
Impedance Non-constant
Frequency Range DC-300 MHz
Voltage Rating 500 volts rms(min)

Mechanical:
Mating 5/8-24 threaded coupling
Cable Affixment Braid and Center Contact Crimp

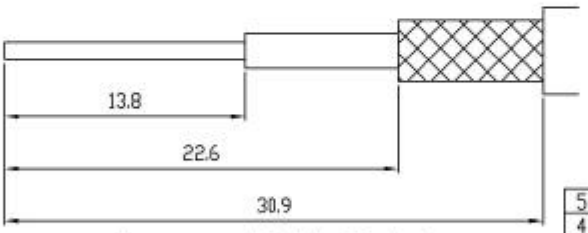

Recommend Cable Stripping

HT-5333A



Die Size A Die Size B

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH	ITEM #	CODE
5	FERRULE	BRASS	1	NICKEL	6.5x5.33x12.7	C270(
4	BODY	BRASS	1	NICKEL	205A-1	C360
3	INSULATOR	TEFLON	1		205D-3	ASTM I
2	CENTER PIN	BRASS	1	SILVER	205A-2C	C360
1	SHELL	BRASS	1	NICKEL	205D-8	C360

尺 寸(mm)	公 差
0-5mm	±0.05
5-10mm	±0.1
10-15mm	±0.2
15-20mm	±0.3
20mm 以上	±0.4

製圖 DRAW		名稱 TITLE	組合圖	品名 TITLE	205A-TBSN/1/1	版次 VERSION	參考版
設計 DESIGNED				電腦檔名 COMPUTER NAME		編號 SERIES #	
檢圖 CHECHRED	mark/2010	備註 REMARK	UHF Plug Crimp for RG58				
核定 APPROVED							
單位 UNIT M/M	比例 SCALE 3:1	日期 DATE	06/21/2010				