
Heavy Duty Multifunction Antenna



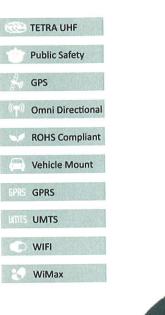

GPSB


Four elements in one sleek housing TETRA, GPS, Multiband GSM, 3G UMTS & WLAN in one antenna Heavy duty design for any UHF or VHF whip

The heavy duty GPSB antenna series combines four different antennas in a sleek mounting. Only a single hole is required to mount the antenna, making this a far quicker and easier solution than using four different antennas.

The versatility of the antenna makes it ideal for logistics and asset tracking. The external UHF or VHF whip can be used as a simple two-way radio link with a hub, the 3G UMTS antenna or GPRS antenna can be used for data feeds and mobile phone calls, the GPS antenna can be used for navigation and vehicle tracking, whilst the WLAN antennas can download data back at the depot.

Four complicated functions in just one rugged antenna.

Technical Drawing

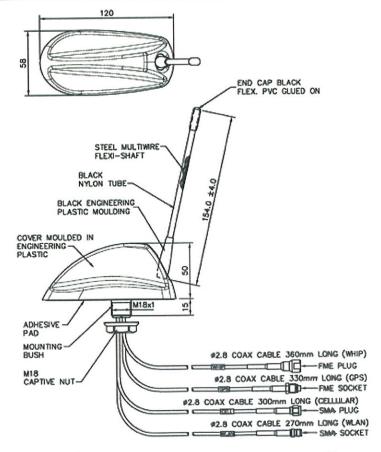



Part No.			
Tartito.		GPSB1-TET	
Electrical Data			
Frequency Range (MHz)		380-430, 890-960, 1710-1880, 1850-1990, 1900-2170, 2400-2470 & 5400-5800	
Operational Band		TET, GSM900, GSM1800, PCS1900, 3G UMTS, 2.4GHz WLAN, 5.4GHz WLAN	
·			
Gain: Isotropic		2dBi (on all bands)	
Compared to ¼ wave		OdB (on all bands) Vertical	
Polarisation		Omni-directional	24
Pattern		50Ω	
Impedance		25	
Max Input Power (W			
GPS Data		1575	
Frequency Range (MHz)		<1.5:1 ± 4MHz	
VSWR Gain: LNA		26dB	
Polarisation		Right Hand Circular	
Operating Voltage		3-7V DC (fed via coax)	
Current		Typical 14mA	
Mechanical Data			
Dimensions (mm)	Total Height	157.5	
	Height of Base	50	
	Length	120	
	Width	58	
Operating Temp (°C)		-40° / +80°C	
Material		Engineering plastic	
Colour		Black	
Cable Data			
Cable Type	TETRA	RG316	
	GPS	RG316	
	Cellular	RG316	
	WLAN	RG316	
Thickness	TETRA	2.8	
	GPS	2.8	
	Cellular	2.8	
	WLAN	2.8	
Length (m)	TETRA	0.36	
	GPS	0.33	
	Cellular	0.30	
	WLAN	0.27	
Termination	TETRA	FME plug	
	GPS	FME socket	
	Cellular	SMA plug	
	WLAN	SMA socket	